




<b>System Performance:</b>	27W
<b>Temperature :</b>	4000K
<b>Luminous Flux:</b>	4000 lm
<b>CRI:</b>	80
<b>Luminous Efficiency:</b>	148 lm/W
<b>Voltage - Frequency:</b>	220-240V - 50/60 Hz
<b>Protection Class:</b>	IP20, I, IK06
<b>Colour:</b>	White RAL9016
<b>Dimensions:</b>	620 x 620 x 72mm




## DETAILS

### APPLICATION


Architectural Lighting  
Interior Lighting



### ΚΑΤΑΣΚΕΥΑΣΤΗΣ



### ΧΩΡΑ ΠΡΟΕΛΕΥΣΗΣ

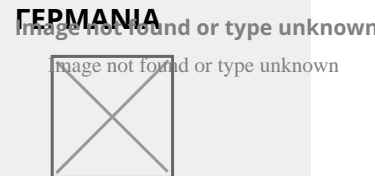

## BELVISO C2

The Belviso luminaire family represents high quality lighting solutions together with glare-free light and unusual lighting effects. The design of the Belviso Cassette as a pure surface is enlivened by the precisely delineated light contour. The colour-illuminated light frame is available optionally and achieves an emotional upgrading of the lighting design. Five expressive alternatives mean that room-specific or individual colour codings can be selected.

### Applications

For innovative, prestigious lighting or auxiliary lighting in retail areas, foyers, corridors, office areas, conference rooms, hotels, restaurants and living spaces.

### Mounting methods

Can be universally used in cut-out recess openings and in system ceilings with concealed or exposed grids. Installation in system ceilings with asymmetric, concealed grids on request. For system dimension 625 mm x 625 mm, For ceiling cut-outs 580 mm x 580 mm, Recess depth 330 mm.

