



LIGHT TECHNOLOGY


LED

System Power:	34W / 39W / 44W
Colour Temperature:	4000K
Luminous Flux:	up to 5100Lm
Colour Rendering Index (CRI):	>80
Luminaire Efficiency:	up to 116Lm/W
Lighting Distribution:	Direct
Weight:	4.9Kg / 7Kg / 8.2Kg
Protection rating. Class:	IP20 , I
Colour:	traffic White
Dimensions:	Ø:415 x Y:100mm / Ø:500 x Y:115mm / Ø:600 x Y:125mm


DETAILS

APPLICATION

Office Lighting

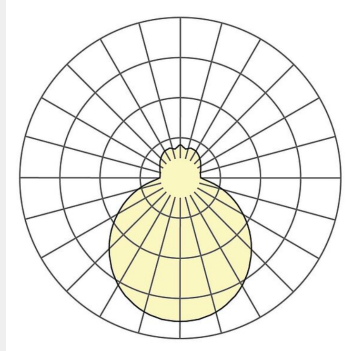

ΚΑΤΑΣΚΕΥΑΣΤΗΣ



ΧΩΡΑ ΠΡΟΕΛΕΥΣΗΣ



CORONA A

Surface-mounted luminaire CORONA A from LICHTWERK. Made of mouth-blown, triple-layer frosted opal glass. Housing colour traffic white RAL 9016. Electrical connection via five-pole connection terminal with plug-in contacts; with integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5mm². Suitable for ceiling- or for wall-mounting.