



LIGHT TECHNOLOGY

LED


System Power:	34W / 39W / 44W
Colour Temperature:	4000K
Luminous Flux:	up to 5100Lm
Colour Rendering Index (CRI):	>80
Luminaire Efficiency:	up to 116Lm/W
Lighting Distribution:	Direct / Indirect
Weight:	5.1Kg / 7.3Kg / 9.8Kg
Protection rating. Class:	IP20 , I
Colour:	White Aluminium
Dimensions:	Ø:415 x H:100mm / Ø:500 x H:115mm / Ø:600 x H:125mm




DETAILS

APPLICATION

Interior & Architectural
Lighting

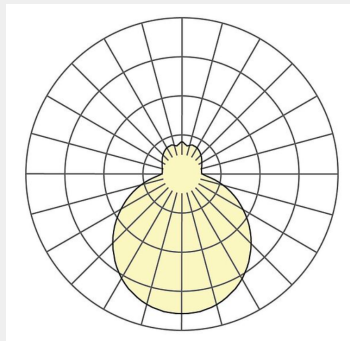

MANUFACTURER



COUNTRY OF ORIGIN



CORONA H

Pendant luminaire CORONA H from LICHTWERK. Made of mouth-blown, triple-layer frosted opal glass. Housing colour white aluminium RAL 9006. Electrical connection via three-pole feedin and connection terminal with plug-in technology, with integrated protective earth connection and unlocking button, suitable for rigid and flexible cables up to 2,5mm². Ceiling canopy structure-coated metallic grey. Steel wire suspension with rapid coupling, free height adjustment from 1000 to 2000mm.