




**LIGHT TECHNOLOGY**  
LED

<b>Voltage:</b>	220...240V , 50/60Hz
<b>Colour Temperature:</b>	4000K
<b>Colour Rendering Index (CRI):</b>	>80
<b>System Power:</b>	30W
<b>Luminous Flux:</b>	3588Lm
<b>Luminaire Efficiency:</b>	120Lm/W
<b>Protection Rating Class (IP) , CLASS:</b>	IP65 , I
<b>Dimensions:</b>	L:90 x W:154 x H:209mm
<b>Beam Angle:</b>	120°
<b>Weight:</b>	0.77Kg
<b>Colour:</b>	Black


**DETAILS**

**APPLICATION**

Outdoor Lighting

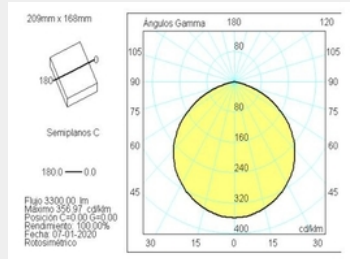

**ΚΑΤΑΣΚΕΥΑΣΤΗΣ**



**ΧΩΡΑ ΠΡΟΕΛΕΥΣΗΣ**

**SPAIN**

**Floodlight Outdoor Projector 30W**

Floodlight outdoor projector from the TROLL family Fargo setting an advanced and innovative thermal balance system through passive dissipation with stable colour temperature of 4000K (neutral white) optimised to be used as Indoor or outdoor lighting of high heights spaces and structures. Designed for floor wall or ceiling surface mounted. Body built in extruded aluminium with frontal protection made of tempered glass finished in black. Luminaire is IP65. Luminaire built-in a reflector made of high purity aluminium with an angle beam of 120°. Luminaire sets a 30W LED source with CRI higher than 80 % and a chromatic dispersion lower than 5 SMCD. Luminaire sets a ball joint system which allows tilting 260°. Fixture has a luminous flux of 3588Lm, with an efficiency of 120Lm/W and a total consumption of 30W. The average life for the luminaire is 25000 h (stabilised at a minimum flux of 70 % from the original). Luminaire built-in an auxiliary gear ON/OFF fed at 220-240V, 50/60 Hz.