




LIGHT TECHNOLOGY
LED

System Power:	50W
Colour Temperature:	4000K
Luminous Flux:	6330Lm
Colour Rendering Index (CRI):	>80
Luminaire Efficiency:	126.6Lm/W
Protection Rating Class:	IP65 , I
Light Distribution:	120°
Dimensions:	L:36 x W:188 x H:237
Colour:	Black
Weight:	1.18Kg


DETAILS

APPLICATION

Outdoor Lighting

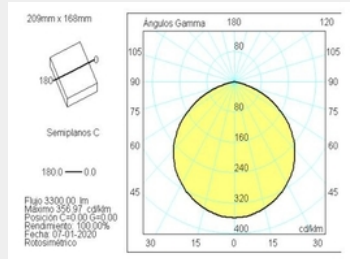

ΚΑΤΑΣΚΕΥΑΣΤΗΣ



ΧΩΡΑ ΠΡΟΕΛΕΥΣΗΣ

SPAIN

Floodlight Outdoor Projector 50W

Floodlight outdoor projector from the TROLL family Fargo setting an advanced and innovative thermal balance system through passive dissipation with stable colour temperature of 4000K (neutral white) optimised to be used as Indoor or outdoor lighting of high heights spaces and structures. Designed for floor wall or ceiling surface mounted. Body built in extruded aluminium with frontal protection made of tempered glass finished in black. Luminaire is IP65. Luminaire built-in a reflector made of high purity aluminium with an angle beam of 120°. Luminaire sets a 50W LED source with CRI higher than 80 % and a chromatic dispersion lower than 5 SMCD. Luminaire sets a ball joint system which allows tilting 260°. Fixture has a luminous flux of 6330Lm, with an efficiency of 126.6Lm/W and a total consumption of 50W. The average life for the luminaire is 25000 h (stabilised at a minimum flux of 70% from the original). Luminaire built-in an auxiliary gear ON/OFF fed at 220-240V, 50/60 Hz.