



## LIGHT TECHNOLOGY

LED


<b>System Power:</b>	36W
<b>Light Colour:</b>	4000K
<b>Luminous flux:</b>	up to 3600Lm
<b>Colour rendering index (CRI):</b>	>80
<b>Luminaire Efficiency:</b>	up to 100Lm/W
<b>Lighting Distribution:</b>	Direct light distribution
<b>Weight:</b>	3.1Kg
<b>Protection rating. Class:</b>	IP20 , I
<b>Color:</b>	traffic white RAL 9016
<b>Dimensions:</b>	L:1476 x W:84 x H:76mm



## DETAILS

### APPLICATION

Office Lighting

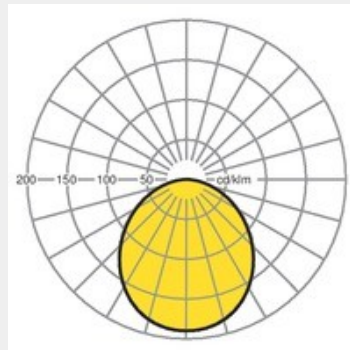

## MANUFACTURER

# REGIOLUX

## COUNTRY OF ORIGIN



## HOKAL 1500

Sheet steel housing suitable for cut-out ceilings and panel ceilings; prepared for fixing of end faces or for mounting in light run arrangements; white coated, similar to RAL 9016; Housing colour traffic white RAL 9016; Direct light distribution; glare suppression using diffuse distribution frosted polycarbonate profile; diffuser is optically seamless for light run mounting; Electrical connection via 3-pole connection terminal with plug-in contacts. Integrated driver. Required accessories: end faces and universal attachment clips UBD for cut-out ceilings or WSPHL for panel ceilings; please order separately.