



LIGHT TECHNOLOGY

LED


System Power:	36W
Light Colour:	4000K
Luminous flux:	up to 3600Lm
Colour rendering index (CRI):	>80
Luminaire Efficiency:	up to 100Lm/W
Lighting Distribution:	Direct light distribution
Weight:	3.1Kg
Protection rating. Class:	IP20 , I
Color:	traffic white RAL 9016
Dimensions:	L:1476 x W:84 x H:76mm



DETAILS

APPLICATION

Office Lighting

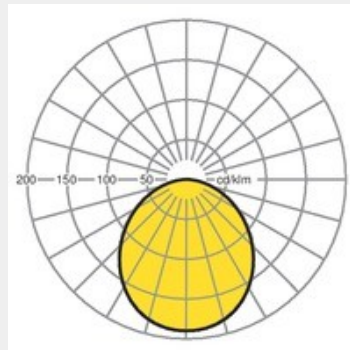

MANUFACTURER

REGIOLUX

COUNTRY OF ORIGIN



HOKAL 1500

Sheet steel housing suitable for cut-out ceilings and panel ceilings; prepared for fixing of end faces or for mounting in light run arrangements; white coated, similar to RAL 9016; Housing colour traffic white RAL 9016; Direct light distribution; glare suppression using diffuse distribution frosted polycarbonate profile; diffuser is optically seamless for light run mounting; Electrical connection via 3-pole connection terminal with plug-in contacts. Integrated driver. Required accessories: end faces and universal attachment clips UBD for cut-out ceilings or WSPHL for panel ceilings; please order separately.