




## LUMINAIRE TYPE

RECESSED

<b>System Performance:</b>	25W
<b>Temperature:</b>	3000K
<b>Luminous Flux:</b>	2600 lm
<b>Luminous Efficiency:</b>	104 lm/W
<b>CRI:</b>	80
<b>Dimensions:</b>	D: 150mm H: 103mm
<b>Voltage - Frequency:</b>	220V - 50/60 Hz
<b>Protection Class:</b>	IP20, II

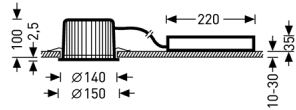


## DETAILS

### APPLICATION


Retail Lighting

### TYPE

Recessed

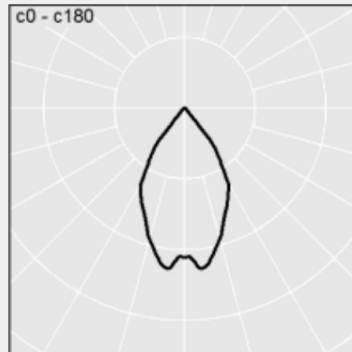

## MANUFACTURER



## COUNTRY OF ORIGIN



## INPERLA

Compact LED downlight with round construction. Recessed downlight for cut-out ceiling openings. Installation in cast concrete ceilings via accessories. Tool-free ceiling installation via rapid-mounting springs. Optically and technically matched refurbishment plates for ceiling apertures with larger ceiling cut-out dimensions are available as accessories in various versions.

[Κατεβάστε το αρχείο πληροφοριών](#)