




LUMINAIRE TYPE

RECESSED

System Performance:	25W
Temperature:	3000K
Luminous Flux:	2600 lm
Luminous Efficiency:	104 lm/W
CRI:	80
Dimensions:	D: 150mm H: 103mm
Voltage - Frequency:	220V - 50/60 Hz
Protection Class:	IP20, II

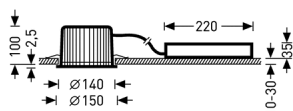


DETAILS

APPLICATION


Retail Lighting

TYPE

Recessed

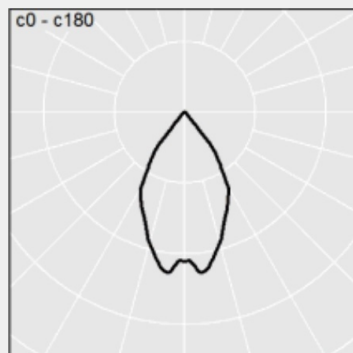

MANUFACTURER



COUNTRY OF ORIGIN



INPERLA

Compact LED downlight with round construction. Recessed downlight for cut-out ceiling openings. Installation in cast concrete ceilings via accessories. Tool-free ceiling installation via rapid-mounting springs. Optically and technically matched refurbishment plates for ceiling apertures with larger ceiling cut-out dimensions are available as accessories in various versions.

[Κατεβάστε το αρχείο πληροφοριών](#)