


LIGHT TECHNOLOGY

LED


System Power:	48W
Colour Temperature:	3000K / 4000K
Luminous Flux:	5932Lm / 6414Lm
Colour Rendering Index (CRI):	>80
Luminaire Efficiency:	125Lm/W / 135Lm/W
Protection Rating Class:	IP20 , I
Gear:	ON/OFF , DALI
Dimensions:	1558 x 321 x 24mm
Weight:	6Kg



DETAILS

APPLICATION

Office Lighting

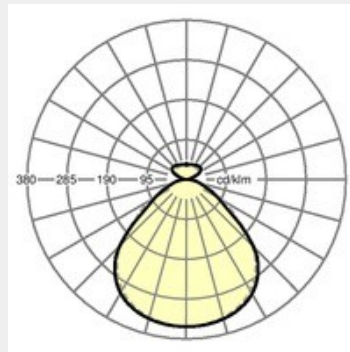

MANUFACTURER

REGIOLUX

COUNTRY OF ORIGIN



KAYAK 1500

Pendant luminaire. Ultra-flat luminaire housing design, painted extruded aluminium profile, visible installation height 10/24mm. Housing colour silver grey/white aluminium RAL 9006. Direct/indirect light distribution, direct share by means of a microprism made of PMMA, homogeneous light emission through lateral LED light coupling in Light Guide panel and semi-diffuse, reflective white coating, with special decoupling technology for defined ceiling illumination; for VDU workstations, omnidirectional glare reduction according to the current norm DIN-EN 12464-1. Integrated LED driver design. Electrical connection via integrated transparent connection cable 5 x 0.75 mm², length 1900 mm, stripped cable ends. Complete height-adjustable suspension set included in the scope of delivery. Suspension set with a canopy and integrated light control available separately as accessories.