




LUMINAIRE TYPE
RECESSED

System Power:	18W
Colour Temperature:	3000K
Luminous Flux:	1609Lm
Colour Rendering Index (CRI):	>80
Luminaire Efficiency:	89.3Lm/W
Lighting Distribution:	Optic Wide Flood
Weight:	0.38Kg
Protection rating. Class:	IP40 , II
Colour:	Matt Black
Dimensions:	Ø:99 x H:75mm

DETAILS

APPLICATION


Interior Lighting
Office Lighting
Retail Lighting

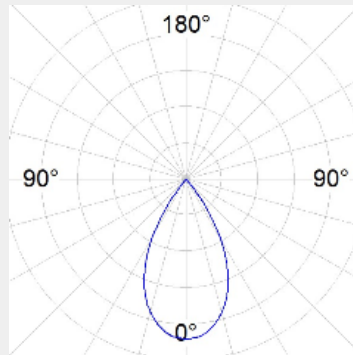

MANUFACTURER



COUNTRY OF ORIGIN



KOMBIC 100 RD

Round recessed downlight model KOMBIC 100 RD from LAMP. Reflector made of polycarbonate. Interior reflector and frame in black finish, injected aluminium dissipator. Model for LED COB, with warm white colour temperature and control gear included. IP40 protection rating. Optic Wide Flood to achieve a controlled light distribution and low glare level, less than UGR 17. Insulation class II.