




LUMINAIRE TYPE
RECESSED

System Performance: 20W
Θερμοκρασία: 2700-5000K
Luminous Flux: 1653-1721 lm
CRI: 90
Dimensions: D: 150mm
Material: Die-cast Aluminum
Voltage - Frequency: 220V - 50/60 Hz
Protection Class: IP43

DETAILS

APPLICATION

Interior Lighting
 Office Lighting
 Retail Lighting

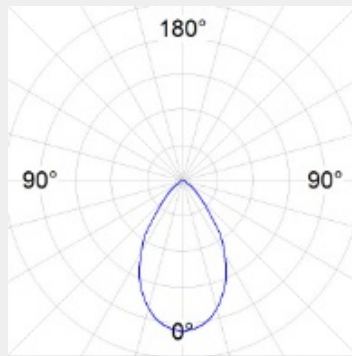

MANUFACTURER



COUNTRY OF ORIGIN

Image not found or type unknown



Image not found or type unknown



KOMBIC 150 OPAL

Downlight recessed round model KOMBIC 150 OPAL 3500 IP40 NW WFL BK/BK Lamp brand. Reflector made of polycarbonate black and frame in black finish, and aluminium dissipator . Model for LED COB withe neutral colour temperature and control gear included. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR 19. IP40 protection rating. Insulation class II