



## LIGHT TECHNOLOGY WALL LUMINAIRE


<b>System Performance:</b>	28W
<b>Temperature :</b>	2700/3000K
<b>Luminous Flux:</b>	1500lm
<b>Luminous Efficiency:</b>	53.57lm/W
<b>CRI:</b>	80
<b>Dimensions:</b>	Diameter: 22cm Depth: 6.5cm
<b>Colour:</b>	Black
<b>Voltage - Frequency:</b>	220-240V ~50/60Hz
<b>Protection Classt:</b>	IP65, I



### DETAILS

#### APPLICATION

Architectural Lighting  
Outdoor Lighting

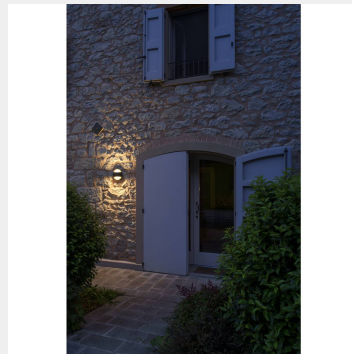

### MANUFACTURER



### COUNTRY OF ORIGIN



## LID II UP/DOWN

Adjustable light colour via CCT switch (2700K/3000K), a high colour rendering index of over 80 and a long lifespan of 50,000 hours: the new LID II UP/DOWN wall light emits a powerful light with its upward and downward-facing, pivoting lamp heads which can be adjusted as needed. Simply perfect for atmospheric lighting of pathways, terraces or walls of homes and office buildings.