



LIGHT TECHNOLOGY WALL LUMINAIRE


System Performance:	28W
Temperature :	2700/3000K
Luminous Flux:	1500lm
Luminous Efficiency:	53.57lm/W
CRI:	80
Dimensions:	Diameter: 22cm Depth: 6.5cm
Colour:	Black
Voltage - Frequency:	220-240V ~50/60Hz
Protection Classt:	IP65, I



DETAILS

APPLICATION

Architectural Lighting
Outdoor Lighting

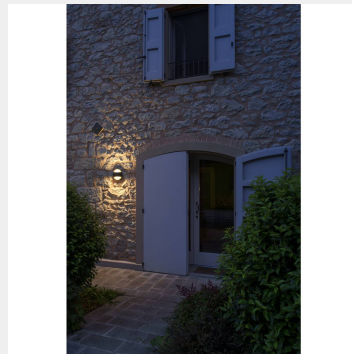

MANUFACTURER



COUNTRY OF ORIGIN



LID II UP/DOWN

Adjustable light colour via CCT switch (2700K/3000K), a high colour rendering index of over 80 and a long lifespan of 50,000 hours: the new LID II UP/DOWN wall light emits a powerful light with its upward and downward-facing, pivoting lamp heads which can be adjusted as needed. Simply perfect for atmospheric lighting of pathways, terraces or walls of homes and office buildings.