

LIGHT TECHNOLOGY

LED


System Power:	30W / 39W
Colour Rendering Index (CRI):	>80
Luminous Flux:	4003Lm / 4982Lm
Colour Temperature:	4000K
Luminaire Efficiency :	134Lm/W / 128Lm/W
Weight:	2.18Kg
Protection Rating Class :	IP20/40 , II
Colour :	traffic White RAL 9016
Dimensions:	L:595 x W:595 x H:33mm



DETAILS

APPLICATION

Office Lighting

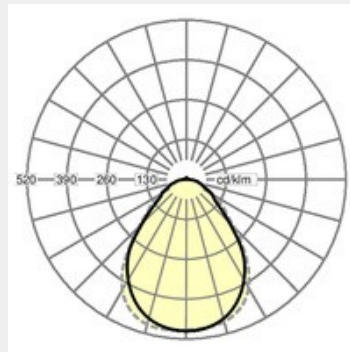

MANUFACTURER

REGIOLUX

COUNTRY OF ORIGIN



LOWEA LOEMP 600

Recessed luminaire. Suitable for ceilings with visible T-bars. flat aluminium frame, powered white, steel plate housing. Housing colour traffic white RAL 9016. LED backlight light technology, direct light distribution using non-yellowing microprismatic PMMA diffuser and single lenses, ideal for VDU workstations. ICR10 65°/3000 cd/m omnidirectional glare reduction in accordance with current DIN EN 12464-1 standard. Including a multi-lumen driver with 4 settable light outputs. Flicker < 5%, flexible 40cm connecting cable by means of a plug system to the luminaire, wired for operation. Protection rating: IP20/IP40 (room)
Accessories: for installation in cut-out ceilings, installation frame 60140003100