




LUMINAIRE TYPE RECESSED

System Power:	12W / 17W / 25W
Colour Temperature:	3000K / 4000K
Luminaire Flux:	up to 1685Lm
Colour Rendering Index (CRI):	>80
Luminaire Efficiency:	up to 80.5Lm/W
Weight:	0.63Kg
Protection rating. Class:	IP44 , II
Colour:	White
Dimensions:	Ø:165 x H:99mm

DETAILS

APPLICATION

Interior Lighting
Office Lighting
Retail Lighting

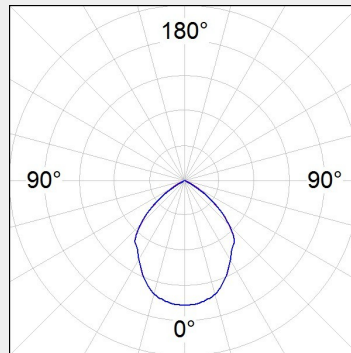


MANUFACTURER



COUNTRY OF ORIGIN

Image not found or type unknown



MINI KOMBIC SQUARE

Lighting MINI KOMBIC SQUARE from LAMP. With internal diffuser made of opal methacrylate especially for LED and bright metal reflector, aluminum injection distributor and TOR KIT fastening system easy to use. Model for COB LED, with warm white color temperature and control equipment. Protection value IP44. Insulation class II.