



LIGHT TECHNOLOGY


LED

System Power:	35W / 66W
Luminous Flux (Lm):	7123Lm
Luminous Efficiency (Lm/W):	108Lm/W
Beam Angle:	120°
Protection Rating Class (IP):	IP65 , I
Colour:	White
Colour Rendering Index (CRI):	>80
Colour Temperature (K):	4000K
Dimensions:	L:1500 x W:99 x H:70mm
Gear:	ON/OFF , DALI , 1-10V Dimmable

DETAILS

APPLICATION

Industrial Lighting

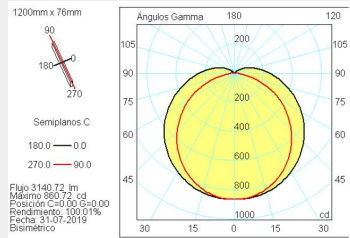

MANUFACTURER

COUNTRY OF ORIGIN

SPAIN

NIX 1500

Waterproof luminaire from the TROLL family Nix setting an advanced and innovative thermal balance system through passive dissipation with stable colour temperature of 4000° K (neutral white) optimised to be used as lighting of parking, garages or industrial areas. Designed for wall or ceiling surface mounted as well as hanging. Body made of polycarbonate finished in grey. Luminaire is IP65. Luminaire built-in an methacrylate diffuser with an angle beam of 120°. Luminaire sets a 68 W LED source with CRI higher than 80 % and a chromatic dispersion lower than 3 SMCD. Fixture has a luminous flux of 7123 Lm, with an efficiency of 108 Lm/W and a total consumption of 66 W. The average life for the luminaire is 30000 h (stabilised at a minimum flux of 70 % from the original). Luminaire built-in an auxiliary gear fed at 220-240V , 50/60 Hz.