



## LIGHT TECHNOLOGY


LED

|                                      |                                |
|--------------------------------------|--------------------------------|
| <b>System Power:</b>                 | 12W / 27W                      |
| <b>Luminous Flux:</b>                | 3141Lm                         |
| <b>Luminous Efficiency:</b>          | 112Lm/W                        |
| <b>Beam Angle:</b>                   | 120°                           |
| <b>Protection Glass IP , Class:</b>  | IP65 , I                       |
| <b>Colour:</b>                       | Grey / White                   |
| <b>Colour Rendering Index (CRI):</b> | >80                            |
| <b>Colour Temperature (K):</b>       | 4000K                          |
| <b>Dimensions:</b>                   | L:600 x W:99 x H:70mm          |
| <b>Gear:</b>                         | ON/OFF , DALI , 1-10V Dimmable |

## DETAILS

### APPLICATION

Industrial Lighting

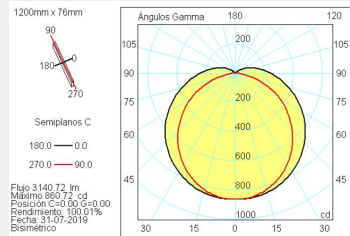

## MANUFACTURER

## COUNTRY OF ORIGIN

SPAIN

## NIX 600

Waterproof luminaire NIX from the TROLL family of Luxiona Group. The luminaire sets an advanced and innovative thermal balance system through passive dissipation with stable colour temperature of 4000° K (neutral white) optimised to be used as lighting of parking, garages or industrial areas. Designed for wall or ceiling surface mounted as well as hanging. Body made of polycarbonate finished in grey. Luminaire is IP65. Luminaire built-in a methacrylate diffuser with an angle beam of 120°. Luminaire sets a 26W LED source with CRI higher than 80 % and a chromatic dispersion lower than 3 SMCD. Fixture has a luminous flux of 3141Lm, with an efficiency of 112Lm/W and a total consumption of 28W. The average life for the luminaire is 30000 h (stabilised at a minimum flux of 70 % from the original). Luminaire built-in an auxiliary gear fed at 220-240V , 50/60 Hz.