



## LUMINAIRE TYPE CEILING

- System Performance:** 40W
- Temperature :** 3000K
- Luminous Flux:** 5878 lm
- CRI:** 80
- Dimensions:** D: 620mm H: 091mm
- Luminous Efficiency:** 147 lm/W
- Colour:** White
- Voltage - Frequency:** 230V 50/60Hz
- Driver:** Dali
- Protection Class:** IP50, IK07

Glare rating according to UGR											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	50	30	30	20	50	50	30	30	20
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Line of vision across the lamp axis					Line of vision along the lamp axis				
X	Y										
2M	2M	19.0	20.3	19.3	20.6	20.8	19.0	20.3	19.3	20.6	20.8
2M	3M	20.5	21.6	20.8	21.9	22.2	20.5	21.6	20.8	21.9	22.2
2M	4M	21.0	22.1	21.4	22.4	22.7	21.0	22.1	21.4	22.4	22.7
2M	6M	21.3	22.3	21.7	22.7	23.0	21.3	22.3	21.7	22.7	23.0
2M	8M	21.4	22.3	21.8	22.7	23.1	21.4	22.3	21.8	22.7	23.1
2M	12M	21.4	22.3	21.8	22.7	23.0	21.4	22.3	21.8	22.7	23.0
4M	2M	18.7	20.7	20.0	21.1	21.4	18.7	20.7	20.0	21.1	21.4
4M	3M	21.3	22.2	21.7	22.6	22.9	21.3	22.2	21.7	22.6	22.9
4M	4M	21.9	22.8	22.4	23.1	23.5	21.9	22.8	22.4	23.1	23.5
4M	6M	22.4	23.1	22.8	23.5	23.8	22.4	23.1	22.8	23.5	23.8
4M	8M	22.5	23.1	22.9	23.5	24.0	22.5	23.1	22.9	23.5	24.0
4M	12M	22.5	23.1	22.9	23.5	24.0	22.5	23.1	22.9	23.5	24.0
8M	4M	22.2	23.8	23.6	23.3	23.7	22.2	23.8	23.6	23.3	23.7
8M	6M	22.7	23.2	23.2	23.7	24.2	22.7	23.2	23.2	23.7	24.2
8M	8M	22.8	23.3	23.4	23.8	24.3	22.8	23.3	23.4	23.8	24.3
8M	12M	22.9	23.3	23.4	23.8	24.3	22.9	23.3	23.4	23.8	24.3
12M	4M	22.2	23.8	22.7	23.2	23.7	22.2	23.8	22.7	23.2	23.7
12M	6M	22.7	23.2	23.2	23.7	24.2	22.7	23.2	23.2	23.7	24.2
12M	8M	22.9	23.3	23.4	23.8	24.3	22.9	23.3	23.4	23.8	24.3


Variation of the viewer position for luminaire distances IS			
S = 1.0M	+0.1 / -0.1	+0.1 / -0.1	
S = 1.5M	+0.2 / -0.4	+0.2 / -0.4	
S = 2.0M	+0.2 / -0.8	+0.2 / -0.8	
Default table	BK05	BK05	
Correction summard	5.5	5.5	

Corrected blinding indexes relating to 5878 lm total flux


## DETAILS

### APPLICATION

Interior & Architectural  
Lighting  
Office Lighting

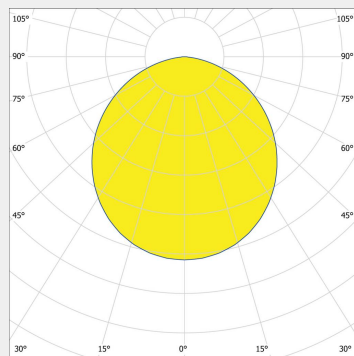

## MANUFACTURER



## COUNTRY OF ORIGIN

**AUSTRIA**

## ODELIA

The haute couture of surface luminaires has arrived!

Whether as a pendant, surface-mounted or wall-mounted luminaire, odelia always impresses with its pure elegance. With its tasteful design frame and simple housing odelia can bring thousands of colour combinations to life and set special accents with the bi-colour option.

With high energy efficiency, the optional microprismatic cover offers optimal visual comfort. In addition, the satiné version with, for example, a direct/indirect light beam creates a cosy and inviting atmosphere.

[Download the datasheet](#)