



## LIGHT TECHNOLOGY


LED

<b>System Power:</b>	32W
<b>Light Colour:</b>	3000K / 4000K
<b>Luminous flux:</b>	up to 3700Lm
<b>Colour rendering index (CRI):</b>	>80
<b>Luminaire Efficiency:</b>	up to 119Lm/W
<b>Lighting Distribution:</b>	Direct light distribution using microprismatic glass
<b>Weight:</b>	3.79Kg
<b>Protection rating. Class:</b>	IP20 / IP40 , II
<b>Colour:</b>	traffic white RAL 9016
<b>Dimensions:</b>	L:595 x W:595 x H:13mm

## DETAILS

### APPLICATION

Office Lighting

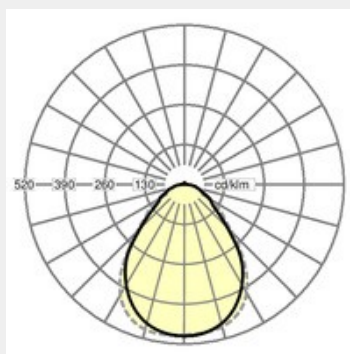

## MANUFACTURER

**REGIOLUX**

## COUNTRY OF ORIGIN



## PANELLA 600

Extremely flat white powder coated aluminium frame, installation height 13mm, galvanised sheet steel cover suitable for ceilings with exposed T-bars. Housing colour traffic white RAL 9016; Direct light distribution using opal acrylic diffuser. External LED driver with luminaire wired via 400 mm flexible connection cable using connector system ready for operation. Note on protection rating: IP20 for surface mounting and suspended installation, IP40 for mounting in suspended ceiling grid. Recommended accessories for ceiling mounting, mounting kit PE-AS 600 and PE-AR 600/625, and for suspended installation, suspension kit PE-HS, ordered separately.