



LIGHT TECHNOLOGY






LED

System Power:	38 / 42 / 45 / 49 / 53 / 56 / 60 / 64
Light Colour:	3000K / 3500K / 4000K
Luminous flux:	up to 9,030 lm
Colour Rendering Index (CRI):	>80
Luminaire Efficiency:	up to 147Lm/W
Lighting Distribution:	double asymmetrical 25° / WideFlood 60° / Xtra WideFlood 90°
Protection rating. Class:	IP20
Color:	Matt Black / Matt White
Beam:	double asymmetrical / WideFlood

DETAILS

APPLICATION

Retail Lighting
Interior & Architectural
Lighting

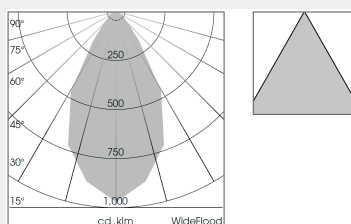

ΚΑΤΑΣΚΕΥΑΣΤΗΣ

BÄRO
Retail
Lighting

ΧΩΡΑ ΠΡΟΕΛΕΥΣΗΣ

**MADE
IN
GERMANY**

PENDIRO TX

As a floating panel the PendiRO TX LED suspended luminaire adds an elegant accent to the room. No cables interfere with the minimalist look as the current is conducted through the slender suspension cables. PendiRO TX can be configured for either ceiling mounting or track mounting. It offers a practical and elegant solution for general illumination of tables, counters and shelves.