



## LIGHT TECHNOLOGY

LED


<b>System Power:</b>	34W / 40W / 44W
<b>Colour Temperature:</b>	4000K
<b>Luminous Flux:</b>	up to 5200Lm
<b>Colour Rendering Index (CRI):</b>	>80
<b>Luminaire Efficiency:</b>	up to 119Lm/W
<b>Lighting Distribution:</b>	Direct - Indirect
<b>Weight:</b>	5.3Kg / 8.2Kg / 10.8Kg
<b>Protection rating. Class:</b>	IP20 , I
<b>Colour:</b>	White Aluminium
<b>Dimensions:</b>	Ø:415 x H:80mm / Ø:500 x H:90mm / Ø:600 x H:100mm




## DETAILS

### APPLICATION

Interior & Architectural Lighting

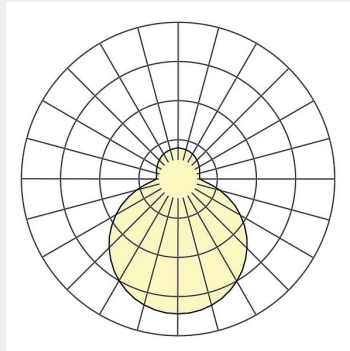

## ΚΑΤΑΣΚΕΥΑΣΤΗΣ



## ΧΩΡΑ ΠΡΟΕΛΕΥΣΗΣ



## PUCK H

Pendant luminaire PUCK H from LICHTWERK. Made of mouth-blown, triple-layer frosted opal glass. Housing colour white aluminium RAL 9006. Electrical connection via three-pole connection terminal with plug-in contacts; with integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5mm<sup>2</sup>. Ceiling canopy structure-coated. Steel wire suspension with rapid coupling, free height adjustment from 1000 to 2000mm.