



LIGHT TECHNOLOGY


LED

System Power:	34W / 40W / 44W
Colour Temperature:	4000K
Luminous Flux:	up to 5200Lm
Colour Rendering Index (CRI):	>80
Luminaire Efficiency:	up to 119Lm/W
Lighting Distribution:	Direct - Indirect
Weight:	5.3Kg / 8.2Kg / 10.8Kg
Protection rating. Class:	IP20 , I
Colour:	White Aluminium
Dimensions:	Ø:415 x H:80mm / Ø:500 x H:90mm / Ø:600 x H:100mm


DETAILS

APPLICATION

Interior & Architectural
Lighting

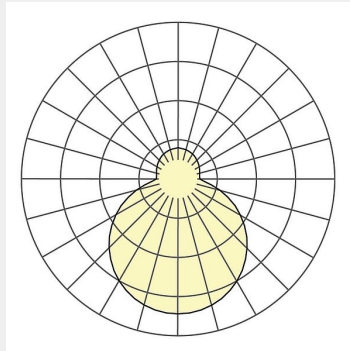

ΚΑΤΑΣΚΕΥΑΣΤΗΣ



ΧΩΡΑ ΠΡΟΕΛΕΥΣΗΣ



PUCK H

Pendant luminaire PUCK H from LICHTWERK. Made of mouth-blown, triple-layer frosted opal glass. Housing colour white aluminium RAL 9006. Electrical connection via three-pole connection terminal with plug-in contacts; with integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5mm². Ceiling canopy structure-coated. Steel wire suspension with rapid coupling, free height adjustment from 1000 to 2000mm.