



## LUMINAIRE TYPE

RECESSED


<b>System Power:</b>	31W
<b>Colour Temperature:</b>	3000K / 4000K
<b>Luminous Flux:</b>	2912Lm / 3000Lm
<b>Colour Rendering Index (CRI):</b>	80
<b>Luminaire Efficiency:</b>	94Lm/W / 97Lm/W
<b>Weight:</b>	1.21Kg
<b>Protection rating. Class:</b>	IP44 , II
<b>Colour:</b>	White
<b>Dimensions:</b>	Ø:230 x H:59mm
<b>Gear:</b>	ON/OFF , DALI



## DETAILS

### APPLICATION

Retail Lighting  
Office Lighting

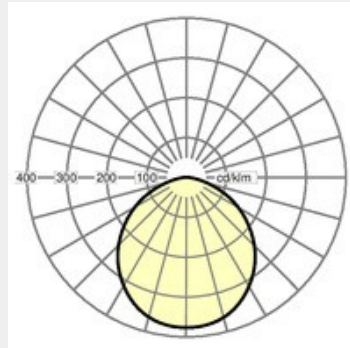

## MANUFACTURER

# REGIOLUX

## COUNTRY OF ORIGIN



## RELO

The RELO downlight range is discrete and versatile. As you would expect, it is simply constructed and easy to work with. With its robust die-cast housing and room-side IP44 protection rating, it keeps many options open. The relo can blend in with any ambience thanks to its shape and our selection of sizes. A graceful appearance is achieved through the recessed diffuser panel and the narrow edging.

It creates discrete accents in the ceiling. Housing made of die-cast aluminium painted in RAL 9016 traffic white with driver, wired ready for use, aluminium heat sink for effective passive cooling and recessed opal diffuser panel to break up the ceiling appearance. With fixing springs for installation without tools, suitable for ceiling thickness of 10mm – 20mm. Housing colour white, Direct wide-beam light distribution by means of a opal diffuser with textured surface. Integrated LED driver with luminaire wired ready for operation. Electrical connection via 1m long connection cable, 2x0.75mm<sup>2</sup>.