



## LIGHT TECHNOLOGY


LED

<b>System Power:</b>	98W / 147W / 196W
<b>Light Colour:</b>	4000 K
<b>Luminous flux:</b>	up to 29100Lm
<b>Colour rendering index (CRI):</b>	>80
<b>Luminaire Efficiency:</b>	up to 149Lm/W
<b>Lighting Distribution:</b>	Direct narrow / wide distribution
<b>Protection rating . Class:</b>	IP40 , I
<b>Color:</b>	traffic white RAL 9016
<b>Dimensions:</b>	L:688 x W:340 x H:59mm

## DETAILS

### APPLICATION

Industrial Lighting

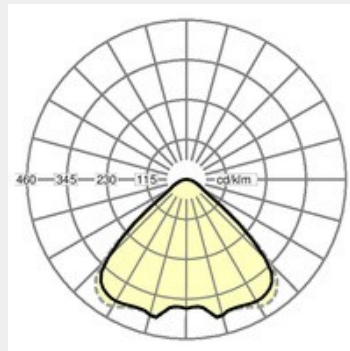

## MANUFACTURER

# REGIOLUX

## COUNTRY OF ORIGIN



## SPORTLER

Powder-coated sheet steel housing, rectangular cross section, with robust steel end faces, rear of housing with integrated locking nuts for fixing accessories for ceiling mounting and chain suspension externally. Housing colour traffic white RAL 9016; Light distribution direct, wide-beam by means of Individual. Lens. Optics made of PMMA plastic. Integrated driver. Electrical connection via 2.3 m long connection cable, 5x1.0 mm<sup>2</sup>. Protection and mounting accessories must be ordered separately.