

LIGHT TECHNOLOGY

LED

System Power:	10W
Light Colour:	2700K / 3000K
Luminous flux:	800Lm
Colour Rendering Index (CRI):	>90
Luminaire Efficiency:	80Lm/W
Lighting Distribution:	30° / 65°
Protection rating. Class:	IP20, I
Colour:	Chrome / White / Mattchrome wet-painted / Black wet-painted



Glare rating according to UGR

µ Ceiling	70	70	50	50	30	70	70	50	50	30
µ Walls	50	30	50	30	30	50	30	50	30	30
µ Floor	20	20	20	20	20	20	20	20	20	20

Room size	Line of vision across the lamp axis					Line of vision along the lamp axis					
	X	Y				X	Y				
2H	2H	9.7	10.4	10.0	10.6	10.8	9.7	10.4	10.0	10.6	10.8
2H	3H	9.7	10.2	9.9	10.5	10.7	9.7	10.2	9.9	10.5	10.7
2H	4H	9.6	10.2	10.0	10.5	10.7	9.6	10.2	10.0	10.5	10.7
2H	6H	9.7	10.2	10.1	10.5	10.8	9.7	10.2	10.1	10.5	10.8
2H	8H	9.9	10.3	10.2	10.6	11.0	9.9	10.3	10.2	10.6	11.0
2H	12H	10.1	10.5	10.4	10.8	11.2	10.1	10.5	10.4	10.8	11.2
4H	2H	9.5	10.1	9.9	10.3	10.6	9.5	10.1	9.9	10.3	10.6
4H	3H	9.5	9.9	9.9	10.3	10.6	9.5	9.9	9.9	10.3	10.6
4H	4H	9.5	9.9	9.9	10.3	10.6	9.5	9.9	9.9	10.3	10.6
4H	6H	9.7	10.1	10.2	10.4	10.8	9.7	10.1	10.2	10.4	10.8
4H	8H	10.0	10.3	10.4	10.7	11.1	10.0	10.3	10.4	10.7	11.1
4H	12H	10.4	10.6	10.8	11.0	11.5	10.4	10.6	10.8	11.0	11.5
8H	4H	9.5	9.8	9.9	10.2	10.5	9.5	9.8	9.9	10.2	10.5
8H	6H	9.8	10.1	10.3	10.5	11.0	9.8	10.1	10.3	10.5	11.0
8H	8H	10.2	10.4	10.7	10.9	11.3	10.2	10.4	10.7	10.9	11.3
8H	12H	10.9	11.0	11.4	11.5	12.0	10.9	11.0	11.4	11.5	12.0
12H	4H	9.5	9.7	9.9	10.2	10.6	9.5	9.7	9.9	10.2	10.6
12H	6H	9.9	10.1	10.4	10.5	11.0	9.9	10.1	10.4	10.5	11.0
12H	8H	10.4	10.5	10.9	11.0	11.5	10.4	10.5	10.9	11.0	11.5

Variation of the viewer's position for luminaire distances 0


S = 1.0H	+5.4 / -3.0	+5.4 / -3.0
S = 1.5H	+8.1 / -3.4	+8.1 / -3.4
S = 2.0H	+10.2 / -3.8	+10.2 / -3.8

Default table: BK02 BK02
Correction summand: -7.6 -7.6
Corrected blinding indices relating to 1112 lm total illuminance


DETAILS

APPLICATION

- Retail Lighting
- Interior Lighting
- Architectural Lighting

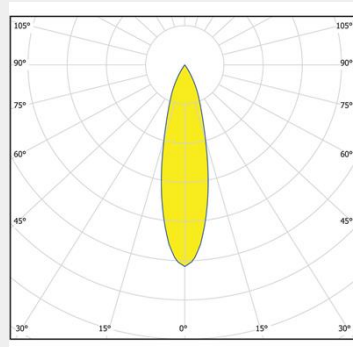

MANUFACTURER



COUNTRY OF ORIGIN:
AUSTRIA

ZENIT M

A visually appealing spotlight that sets the right highlights? That can only be Zenit. Special light colours ensure that the object to be staged is presented in the best possible way – and with high energy efficiency.

The Zenit semi-recessed spotlight LED rigid constructed out of die-cast aluminium in powdercoating RAL9005 black fine matte with an anti-glare cone "high-gloss copper", particularly designed for lighting sales and presentation areas

[Product Datasheet](#)