




## LIGHT TECHNOLOGY

LED


<b>System Power:</b>	25W
<b>Colour Temperature:</b>	4000K
<b>Luminous Flux:</b>	3.450Lm
<b>Colour Rendering Index (CRI):</b>	>80
<b>Luminaire Efficiency:</b>	128.7Lm/W
<b>Weight:</b>	4.42Kg
<b>Protection rating. Class:</b>	IP42 , I
<b>Colour:</b>	White
<b>Dimensions:</b>	L:1.743 x W:70 x H:70mm

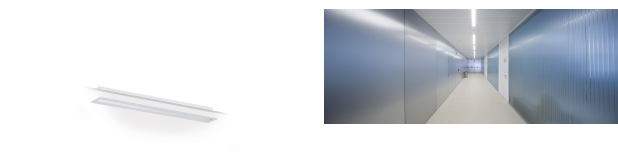

## DETAILS

### APPLICATION

Interior & Architectural  
 Lighting  
 Office Lighting



## MANUFACTURER

**LAMP**  
 Worktitude for light

## COUNTRY OF ORIGIN

**SPAIN**

## FIL 70 PRISMATIC RECESSED

LAMP Fil linear luminaires are a complete family of modular construction for installation, on the ceiling surface, with hanging or recessed installation. Thanks to the reflectors, accessories and various dimensions, it offers great flexibility, making it the ideal choice for general lighting in offices, hotels, restaurants, schools, etc. The FIL 70 PRISMATIC RECESSED luminaire is made of matt white painted extruded aluminium with prismatic polycarbonate diffuser. Model for MID-POWER LED, with neutral white colour temperature and control gear included. Glare rating <19 (for 4h, 8h 70/50/20). IP42, IK06 protection rating. Insulation class I. Photobiological safety group 0.